

The Ghost GLX Series features a continuous extruded aluminum framing channel that provides an engineered cove element that seamlessly integrates into sheetrock walls and soffits.

The Ghost GLX provides a clean and consistent architectural detail that allows indirect linear lighting gear trays to be easily installed.



LED ●●●●●●●●

FEATURES

120Lm/W	Dynamic White
Corners	Continuous Runs
Sun-Like 99CRI	DIM TO DARK
Custom Orders	4 WEEK TURNAROUND

OUTPUT
 - **Standard Output:** 7W per foot 720 Lumens per foot
 - **High Output:** 8W per foot / 960 Lumens per foot
 - **Ultra Output:** 10W per foot / 1200 Lumens per foot.
 - **Dynamic White** - 2700K-6500K

FINISH
 - Powder coat white standard
 - Other RAL color options available please consult factory

DRIVER
 - Integral 120-277v Eldo driver with standard 0-10V dimming for 1%

REFLECTOR
 92% reflective white finish, die-formed steel


OPTIONS
 90° inside and outside corner kits available

OPTICS
 Sateen film diffuser


CERTIFICATIONS
 UL Listed, IBEW (local 3) Union-Made in the USA

MATERIALS
 - Extruded aluminum cove framing system

TECHNICAL DRAWINGS

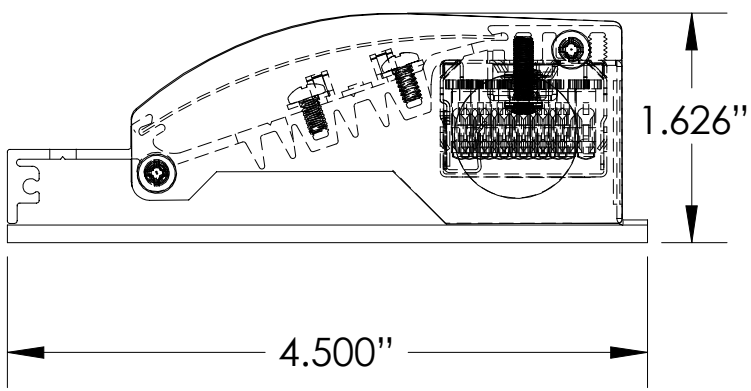

PHOTOMETRICS

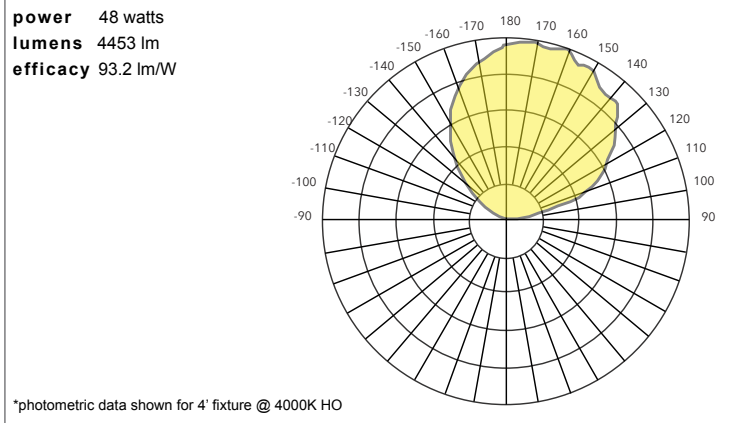

ORDERING INFORMATION

GHOGLX						
FRAMING GHOS - Ghost Cove GLX	CASE LENGTH 8 - 8ft RUN - Specify *field cuttable come in 8' lengths	OPTIONS ICK - Inside Corner Kit OCK - Outside Corner Kit CCK - Custom Corner Kit SFD - Sateen Lens CDC - Clear Dust Cover	COLOR 27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K 50 - 5000K 57 - 5700K 65 - 6500K DW - Dynamic White	OUTPUT ST - Standard Output HO - High Output UL - Ultra Output	LENGTH 2 - 23 1/8" 3 - 33 3/4" 4 - 44 1/4" 6 - 66 1/2" 8 - 88 3/4"	CONTROL STD - standard 0-10V Eldo LED driver DA - DALI Dimming DMX - Tunable White D10 - Dual 0-10V Tunable

Sample Number:

Products / Architectural Lighting / LED / Ghost Cove GLX

