




The Mini Ghost Cove Series features a continuous extruded aluminum framing channel that provides an engineered cove element that seamlessly integrates into sheetrock walls and soffits.

The Mini Ghost provides a clean and consistent architectural detail that allows indirect linear lighting gear trays to be easily installed. Framing sections are field cuttable

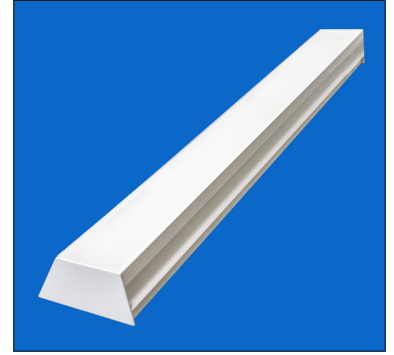

LED ●●●●●●●●

FEATURES

100Lm/W	Dynamic White
Corners	Continuous Runs
Sun-Like 99CRI	DIM TO DARK
Custom Orders	4 WEEK TURNAROUND

OUTPUT
 - Standard output: 8w per foot 800 lumens per foot
 - High output: 10w per foot 1000 lumens per foot
 - Dynamic White 2700-6500K

MATERIALS
 - Extruded aluminum cove framing system
 - Extruded aluminum LED gear trays

FINISH
 - Powder coat white standard
 - Other RAL color options available please consult factory

REFLECTOR
 Matte white finished aluminum


OPTICS
 Optional sateen film diffuser or dust cover

DRIVER
 - Integral 120-277v Eldo driver with standard 0-10V dimming to 1%


OPTIONS
 90° inside and outside corner kits available

CERTIFICATIONS
 UL Listed, IBEW (local 3) Union-Made in the USA

TECHNICAL DRAWINGS

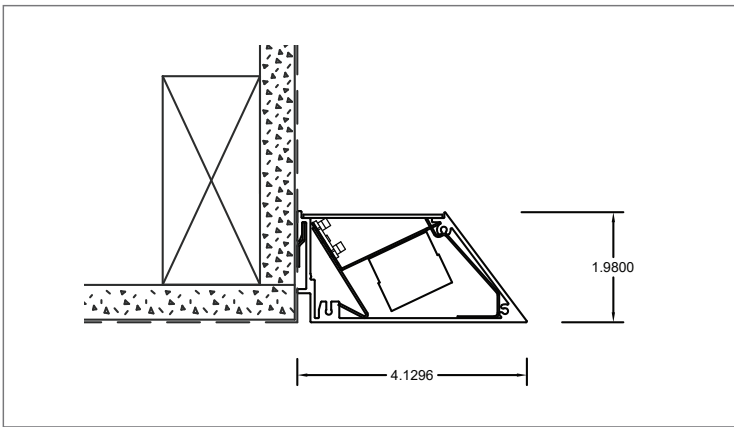

PHOTOMETRICS

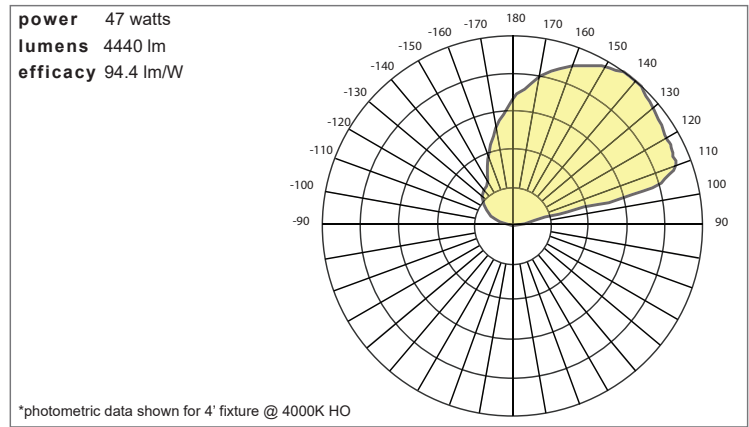

ORDERING INFORMATION

MGHO			MGT				
FRAMING MGHO - Mini-Ghost Cove	CASE LENGTH 8 - 8ft RUN - Specify *field cuttable come in 8' lengths	OPTIONS ICK - Inside Corner Kit OCK - Outside Corner Kit CCK - Custom Corner Kit SFD - Sateen Lens CDC - Clear Dust Cover	GEAR TRAY MGT - Mini-Ghost	COLOR 27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K 50 - 5000K 57 - 5700K 65 - 6500K DW - Dynamic White	OUTPUT ST - Standard Output HO - High Output UL - Ultra Output	LENGTH 2 - 23 1/8" 3 - 33 3/4" 4 - 44 1/4" 6 - 66 1/2" 8 - 88 3/4"	CONTROL STD - standard 0-10V Eldo LED driver DA - DALI Dimming DMX - Tunable White D10 - Dual 0-10V Tunable

Sample Number: MGHO-24-SFD-MGT-35-ST-8-DA



REV.2.3