

The Ghost Cove Square Series features a continuous extruded aluminum framing channel that provides an engineered cove element that seamlessly integrates into sheetrock walls and soffits.

The Ghost Cove Square provides a clean and consistent architectural detail that allows indirect linear lighting gear trays to be easily installed. Gear trays are available in LED, framing sections are field cuttable.



LED ●●●●●●●●

## FEATURES

<b>120Lm/W</b>	<b>Dynamic White</b>
<b>Corners</b>	<b>Continuous Runs</b>
<b>Sun-Like 99CRI</b>	<b>DIM TO DARK</b>
<b>Custom Orders</b>	<b>4 WEEK TURNAROUND</b>

**OUTPUT**  
 - **Standard Output:** 7W per foot 720 Lumens per foot  
 - **High Output:** 8W per foot / 960 Lumens per foot  
 - **Ultra Output:** 10W per foot / 1200 Lumens per foot.  
 - **Dynamic White** - 2700K-6500K

**FINISH**  
 - Powder coat white standard  
 - Other RAL color options available please consult factory

**DRIVER**  
 - Integral 120-277v Eldo driver with standard 0-10V dimming for 1%

**REFLECTOR**  
 92% reflective white finish, die-formed steel


**OPTIONS**  
 90° inside and outside corner kits available

**MATERIALS**  
 - Extruded aluminum cove framing system  
 - Extruded aluminum LED gear trays

**OPTICS**  
 Sateen film diffuser


**CERTIFICATIONS**  
 UL Listed, IBEW (local 3) Union-Made in the USA

## TECHNICAL DRAWINGS

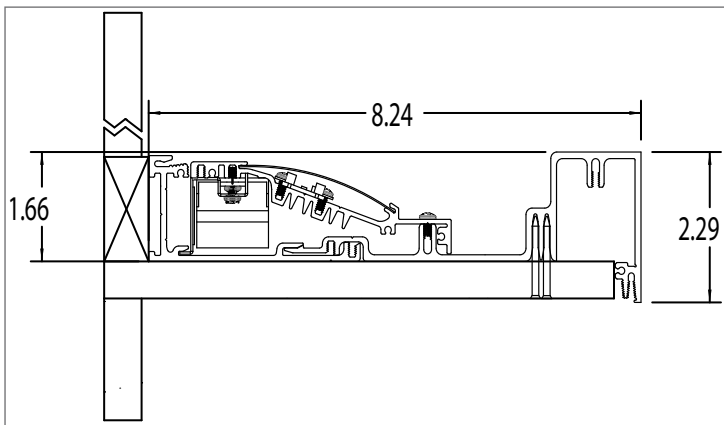

## PHOTOMETRICS

**power** 48 watts  
**lumens** 4453 lm  
**efficacy** 93.2 lm/W

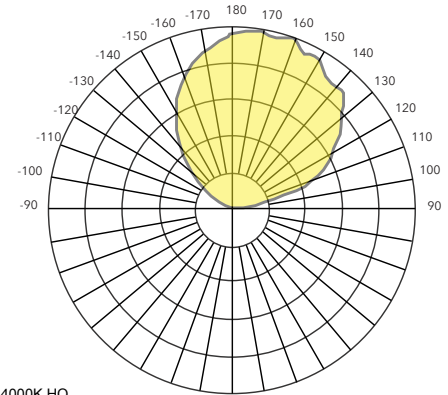

\*photometric data shown for 4' fixture @ 4000K HO

## ORDERING INFORMATION

GHOS			GGT				
<b>FRAMING</b> GHOS - Ghost Cove Square Edge	<b>CASE LENGTH</b> 8 - 8ft RUN - Specify *field cuttable come in 8' lengths	<b>OPTIONS</b> ICK - Inside Corner Kit OCK - Outside Corner Kit CCK - Custom Corner Kit SFD - Sateen Lens CDC - Clear Dust Cover	<b>GEAR TRAY</b> GGT - Ghost	<b>COLOR</b> 27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K 50 - 5000K 57 - 5700K 65 - 6500K DW - Dynamic White	<b>OUTPUT</b> ST - Standard Output HO - High Output UL - Ultra Output	<b>LENGTH</b> 2 - 23 1/8" 3 - 33 3/4" 4 - 44 1/4" 6 - 66 1/2" 8 - 88 3/4"	<b>CONTROL</b> STD - standard 0-10V Eldo LED driver DA - DALI Dimming DMX - Tunable White D10 - Dual 0-10V Tunable

Sample Number:

Products / Architectural Lighting / LED / Ghost Cove Square LED

Apogee Lighting Holdings LLC • 593 Acorn Street • Deer Park, NY 11729 • T: 888-658-6463 • www.LumiNext.Lighting



REV.2.3